



Subject to change without prior notice

Modello Model		TSC.1100	TSC.1100-1
Codice Code		9402062	9402063
Potenza motore Motor Power	kW (50Hz) kW (60Hz)	9 11	13 15
Alimentazione Power supply	V±5% Δ/Y (50Hz) V±5% Δ/Y (60Hz)	380-440 / 660-760 440-480 / 760-830	
Assorbimento Adsorbition	A Δ/Y (50Hz) A Δ/Y (60Hz)	20,2 / 11,7 20,8 / 12	26,3 / 15,2 28,9 / 16,7
Portata Flow rate	m³/h (50Hz) m³/h (60Hz)	1100 1300	1100 1300
Vuoto Vacuum	mbar (50Hz) mbar (60Hz)	-200 -200	-300 -290
Sovrappressione Pressure	mbar (50Hz) mbar (60Hz)	+190 +180	+290 +290
Rumorosità (UNI EN ISO 2151) (K 3dB) Noise level (UNI EN ISO 2151) (K 3dB)	dB(A) (50Hz) dB(A) (60Hz)	76 81	76 81
Peso Weight	kg [N]	122 [1196,8]	133 [1304,7]


Vacuum @ 50Hz – 400V

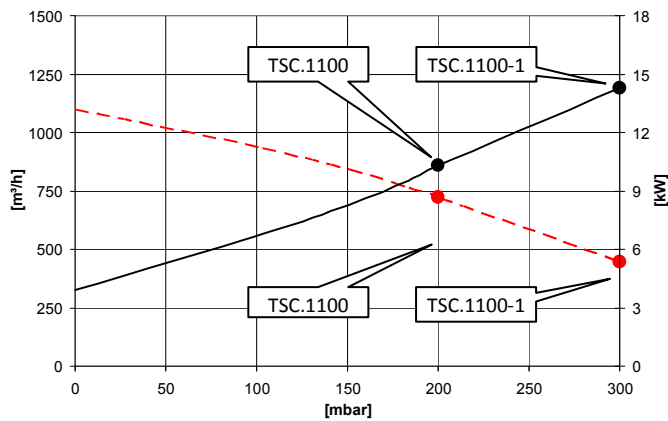


Pressure @ 50Hz – 400V

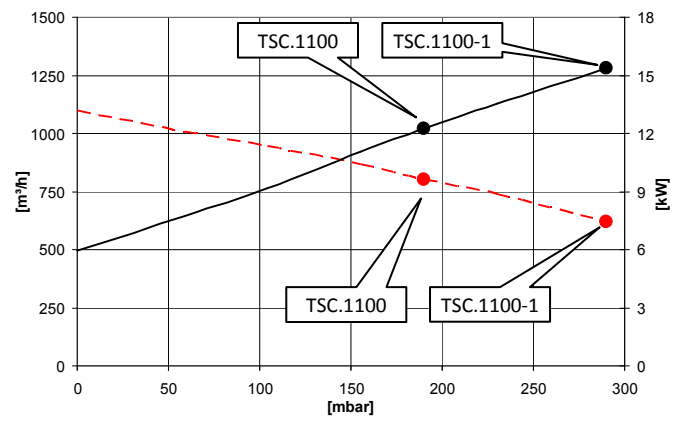

Vacuum @ 60Hz – 460V

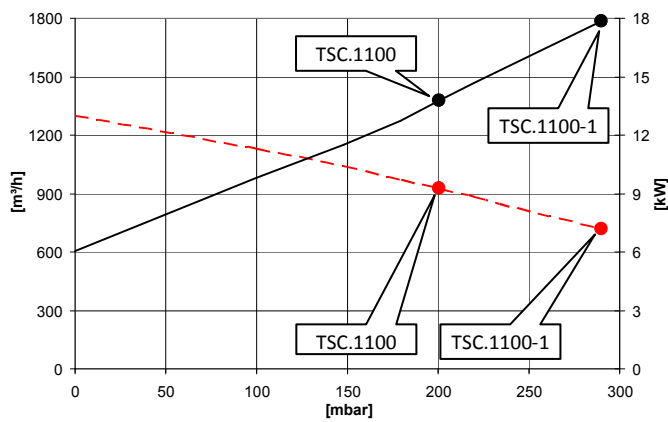

Pressure @ 60Hz – 460V

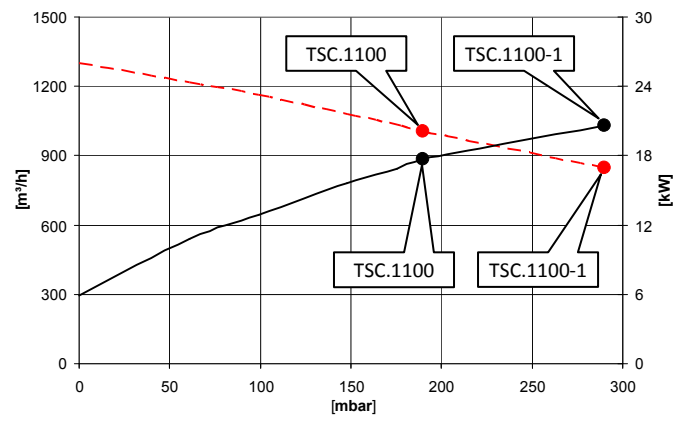


----- Portata / Flow rate

———— Pot. Assorbita / Absorbed Power


Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
 Curves referes to 1013mbar (Abs.) pression and 20°C temperature (tolerance ±10%)

Subject to change without prior notice

50Hz – 400V

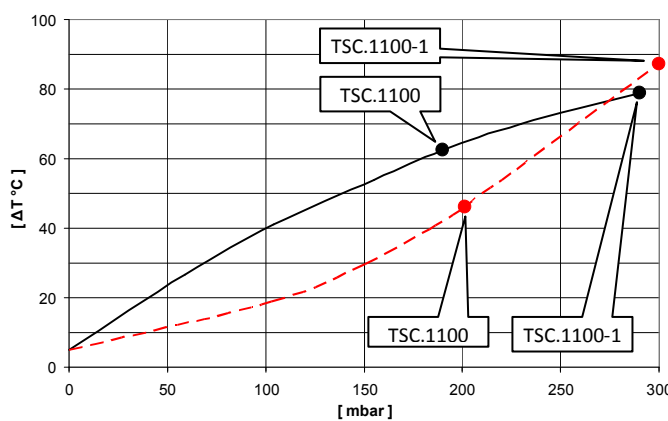

60Hz – 460V

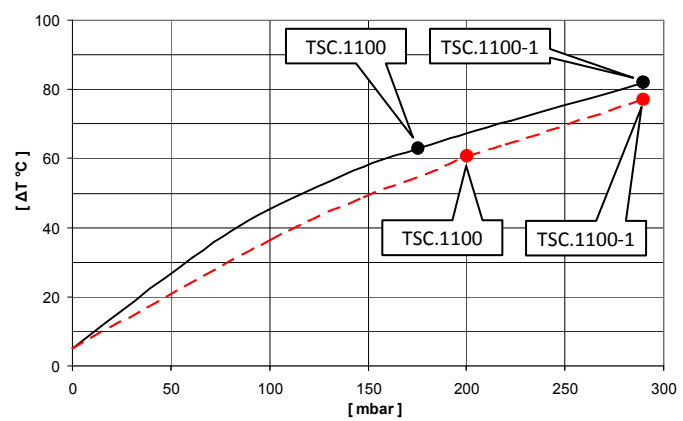

----- Aspirazione / Suction

———— Mandata / Compression

Temperatura ambiente 20°C (tolleranza sulla temperatura ΔT ±5°C)
 Room temperature 20°C (tolerance on temperature ΔT ±5°C)